

Features


- Cast iron with Safeguard® finish
- Less all trim
- Custom pump locations
- 1.5 hp variable speed pump with 1.5 kW heater and back-lit user keypad
- 8 Flexjet™ hydro-massage jets
- 66" (167.6 cm) x 36" (91.4 cm) x 24" (61 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- IAPMO/UPC
- Underwriter's Laboratories (UL)
- ICC/ANSI A117.1
- ASME A112.19.1M
- ASME A112.19.7M

5.5' BATH WHIRLPOOL K-809-HE ALSO K-809-HN

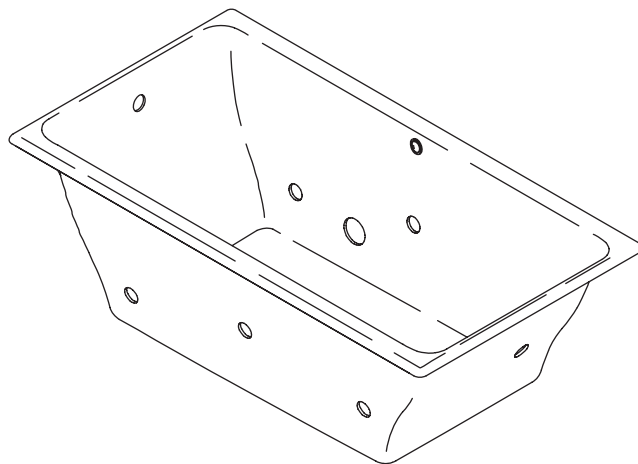

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-809-HE	Bath whirlpool, custom pump location	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-809-HN	Bath whirlpool, custom pump location	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Required Accessories

K-9698	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-7145	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Optional Accessories

K-587	Undermount installation kit		<input type="checkbox"/> NA
K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1703	Remote control		<input type="checkbox"/> NA

Product Specification

The bath whirlpool shall be 66" (167.6 cm) in length, 36" (91.4 cm) in width, and 24" (61 cm) in height. Bath whirlpool shall be made of cast iron with Safeguard® finish. Bath whirlpool shall have 8 Flexjet™ hydro-massage jets, 1.5 hp variable speed pump with 1.5 kW heater, and back-lit user keypad. Bath whirlpool shall have custom pump locations. Bath whirlpool shall be less all trim. Bath whirlpool shall be Kohler Model K-809-_____-_____.

Technical Information

Fixture*:	
Bathing well	
Basin area	45" (114.3 cm) x 25" (63.5 cm)
Top area	58" (147.3 cm) x 29" (73.7 cm)
To overflow	
Water depth	17-3/4" (45.1 cm)
Capacity	97 gal (365.2 L)
Weight	
510 lbs (231.3 kg)	
* Approximate measurements for comparison only.	

Pump	Heater	V	Hz	A*
1.5 hp	1.5 kW	240	50/60	11
* Approximate measurements for comparison only.				

Cut-out template:	
Drop-in	64-1/2" (163.8 cm) x 34-1/2" (87.6 cm)
Undermount	K-587

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Earth-Leakage Circuit-Breaker (ELCB):

Pump/control 208-240 V, 20 A, 50/60 Hz

Installation Notes

Install this product according to the installation guide.

Floor support under the bath whirlpool must provide for a minimum of 2000 lbs (907.2 kg) loading.


The required access panel must be a minimum of 34" (86.4 cm) in width and 15" (38.1 cm) in height.

Cast iron bath whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing the bath to a deck.

Hot water supply should be 70% of capacity or greater. Installations will vary.

The pump must be relocated to the custom location at the time of installation. Provide adequate clearance.

No change in measurements if connected with drain illustrated. (K-7145 or K-7145M)

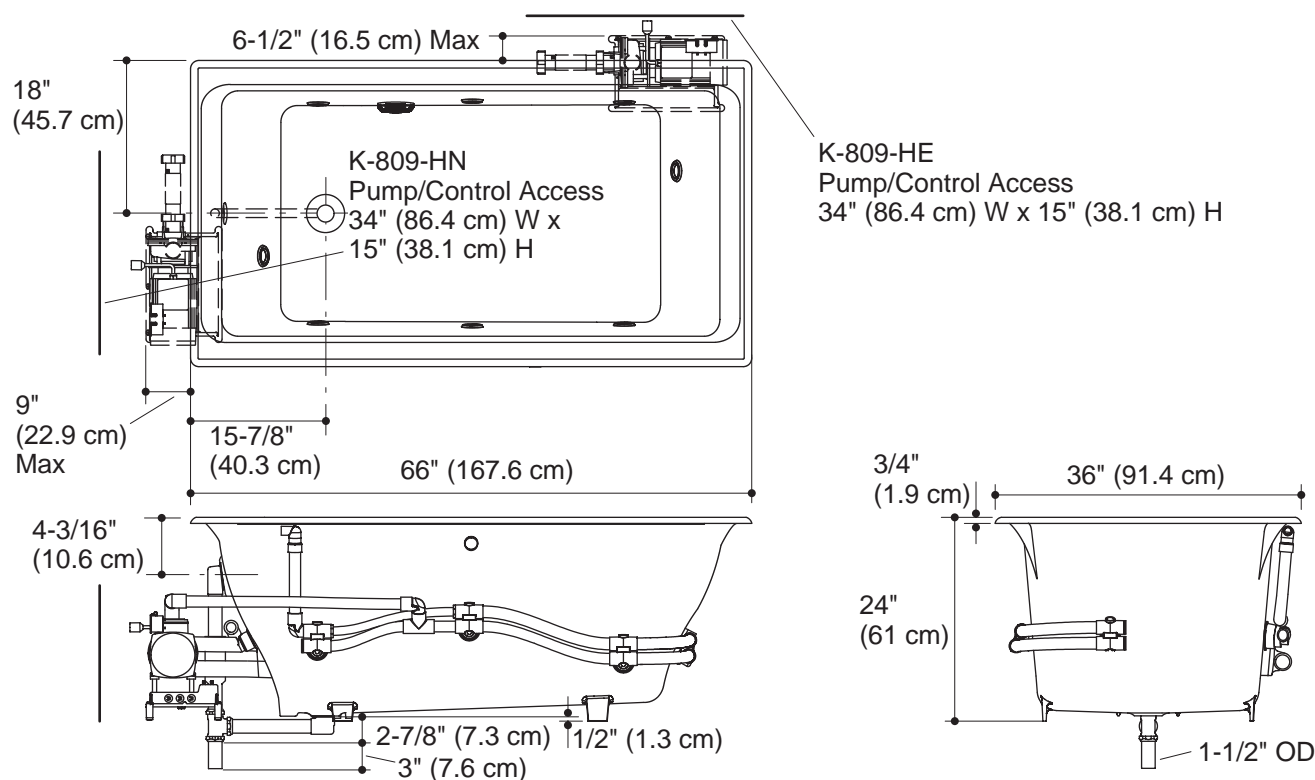

Product Diagram