


### Features

- Vitreous china
- Smooth soft touch actuator
- Plumbing can be installed through wall or floor
- One-piece
- Less supply
- Comfort Height™
- Power Lite® operating system (see electrical service requirements)
- 1.28 gpf (4.8 lpf)
- 12" (30.5 cm) rough-in
- Includes seat and cover
- 16-5/8" (42.2 cm) high bowl without seat, 20-1/8" (51.1 cm) high with seat
- 26-3/16" (66.5 cm) x 20" (50.8 cm) x 20-1/8" (51.1 cm)

### ONE-PIECE TOILET K-3524

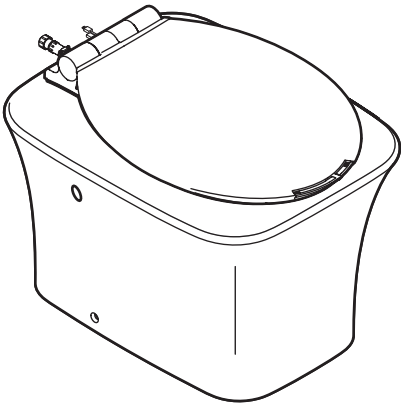

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- Underwriters Laboratories (UL)1795
- Energy Policy Act of 1992
- ASME A112.19.13
- ASME A112.19.2
- IAPMO/cUPC
- CSA B45.0
- CSA B45.1

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-3524	One-piece toilet	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

### Product Specification

The one-piece elongated toilet shall be made of vitreous china. Toilet shall be 26-3/16" (66.5 cm) in length, 20" (50.8 cm) in width, and 20-1/8" (51.1 cm) in height. Toilet shall have a smooth soft touch actuator. Plumbing may be installed through the wall or floor. Toilet shall be 1.28 gpf (4.8 lpf), with Power Lite™ operating system (see electrical service). Toilet shall have a 12" (30.5 cm) rough-in. Toilet shall include seat and cover. Toilet shall be Comfort Height™ and less supply. Bowl shall be 16-5/8" (42.2 cm) high without seat, and 20-1/8" (51.1 cm) high with the seat. Toilet shall be Kohler Model K-3524-\_\_\_\_\_.

# FOUNTAINHEAD™

## Technical Information

Fixture:			
Configuration		one-piece, elongated	
Water per flush		1.28 gal (4.8 L)	
Passageway		2-1/8" (5.4 cm)	
Water area		11" (27.9 cm) x 10" (25.4 cm)	
Water depth from rim		4-7/8" (12.4 cm)	
Included components:			
Seat		1057635	
Pump	VAC	Hz	A
	120	60	8.5


## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Receptacle 120 VAC, 15 A, 60 Hz

## Installation Notes

Install this product according to the installation guide.

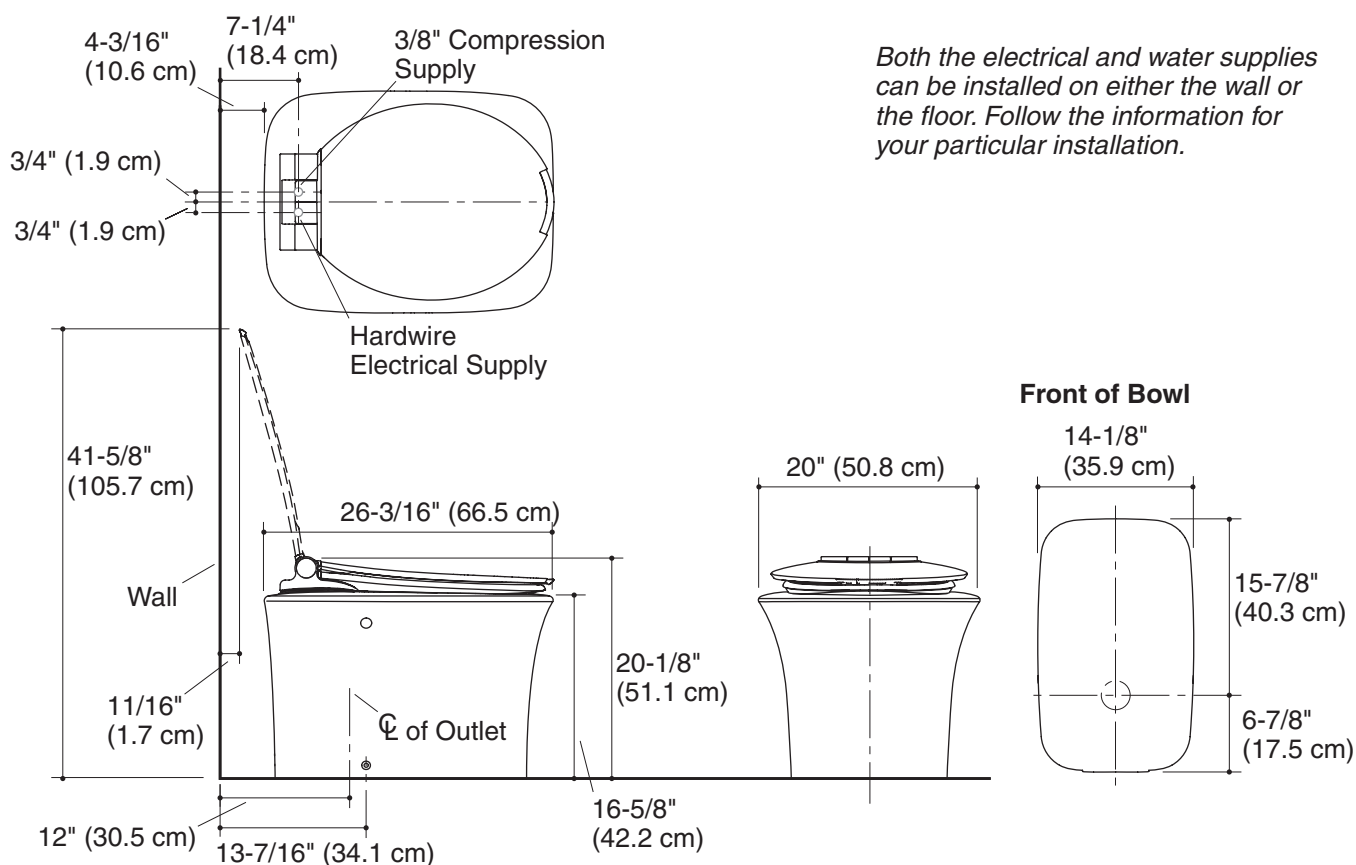

Both the electrical and water supplies can be installed on either the wall or the floor. Follow the information for your particular installation.

## Product Diagram

FOUNTAINHEAD™ ONE-PIECE TOILET

Page 2 of 2  
1065104-4-A

THE BOLD LOOK  
OF **KOHLER**®