


Features

- Vitreous china
- Elongated bowl
- Two-bolt installation system
- Combination toilet
- Flexible supply line included
- Dual Flush flushing system
- Includes polished chrome push buttons
- Minimum 12" (30.5 cm) rough-in
- Seat post holes with 5-1/2" (14 cm) centers
- 1.6 gpf (6 lpf) or 0.8 gpf (3 lpf)
- 4-1/2" (11.4 cm) x 5-3/4" (14.6 cm) water area
- 27-5/8" (70.2 cm) x 14-3/16" (36 cm) x 31-1/2" (80 cm)

DUAL FLUSH TOILET K-3654

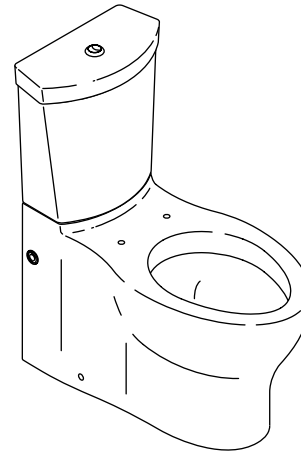

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.2
- IAPMO/UPC
- ASME A112.19.14
- CSA B45.0
- CSA B45.1
- CSA International
- EPA Watersense™

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-3654	Elongated bowl toilet – center push button	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Required Accessories			
K-4664	Brevia™ elongated toilet seat	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Product Specification

The elongated combination toilet shall be made of vitreous china. Toilet shall be 27-5/8" (70.2 cm) in length, 14-3/16" (36 cm) in width, and 31-1/2" (80 cm) in height with a 4-1/2" (11.4 cm) x 5-3/4" (14.6 cm) water area. Toilet shall be two-bolt installation system. Toilet shall be minimum 12" (30.5 cm) rough-in, and less supply. Toilet shall be 1.6 gpf (6 lpf) or .8 gpf (3 lpf) with Dual Flush flushing system. Toilet shall feature seat post holes with 5-1/2" (14 cm) centers. Toilet shall include polished chrome push buttons. Toilet shall be Kohler Model K-3654-_____.

PERSUADE™

Technical Information

Fixture:	
Configuration	two-piece, elongated
Water per flush	1.6 gpf (6 lpf) or 0.8 gpf (3 lpf)
Passageway	2" (5.1 cm)
Water area	4-1/2" (11.4 cm) x 5-3/4" (14.6 cm)
Water depth from rim	8-1/2" (21.6 cm)
Seat post hole centers	5-1/2" (14 cm)


Included components:	
Bowl	K-4322
Tank	K-4419
Tank cover	1052066
Push buttons	1035417

Installation Notes

IMPORTANT! The rough-in must be a minimum of 12" (30.5 cm) or more from the base of the wall or baseboard. The base of the toilet fits tightly against the wall or baseboard. The toilet will not fit correctly if there is less than 12" (30.5 cm) of clear space between the base of the wall or baseboard and the centerline of the outlet. Install or relocate the supply and outlet as necessary to conform to rough-in dimensions.

NOTE: If a baseboard causes the rough-in to be less than 12" (30.5 cm), it must be cut or removed to allow space for the toilet.

Install this product according to the installation guide.

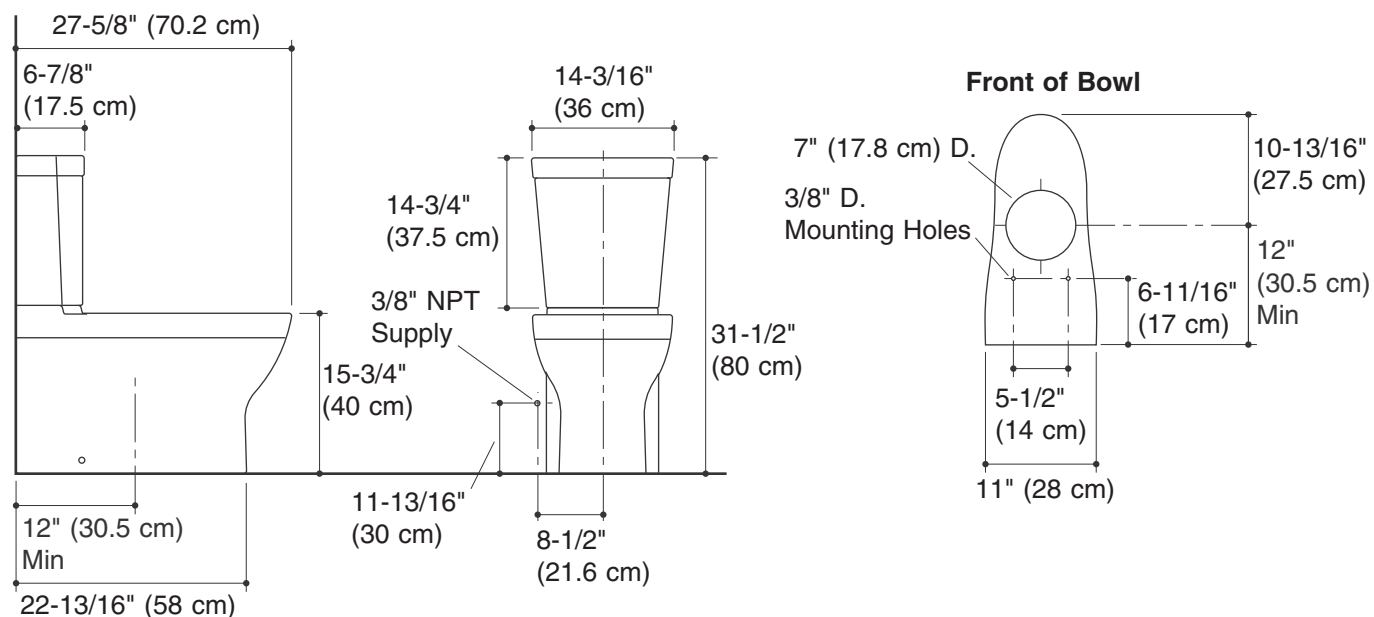

Product Diagram